

DIKE PLAN VIEW


NOTES:

1. INSTALLED SILT DIKE UNIT SHALL HAVE CONTINUOUS AND INTIMATE CONTACT WITH PAVEMENT.

2. ADHESIVES SHALL BE LIQUID NAIL OR APPROVED EQUAL FOR CONCRETE PAVEMENT APPLICATIONS AND EMULSIFIED ASPHALT FOR ASPHALT APPLICATIONS.

ADHESIVE SHALL BE PLACED WHERE THE UNITS OVERLAP AND A 20" STRIP ALONG BOTH EDGES.

3. TACK STRIP SHALL BE FIRMLY ATTACHED WITH REMOVABLE MECHANICAL FASTENER.

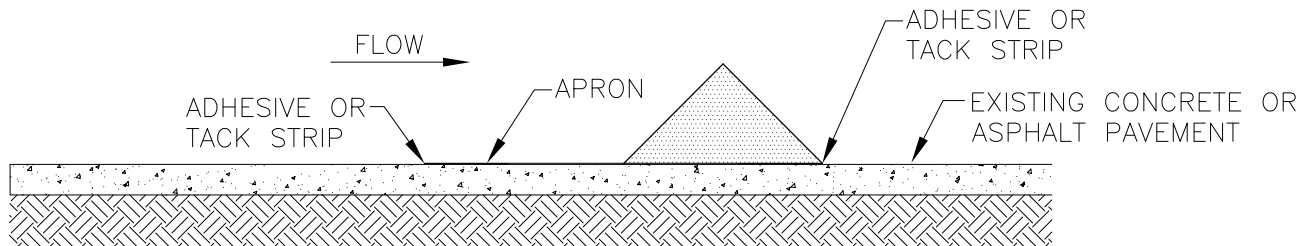

SECTION A-A

SILT DIKE DETAIL
(ON EXISTING PAVEMENT)

NO SCALE

