




NOTE:
 AFTER SITE IS STABILIZED CONTRACTOR SHALL
 REMOVE OUTLET STRUCTURE AND ALL SEDIMENT
 FROM BASIN. FLARED END SECTION IS THEN TO BE
 INSTALLED.

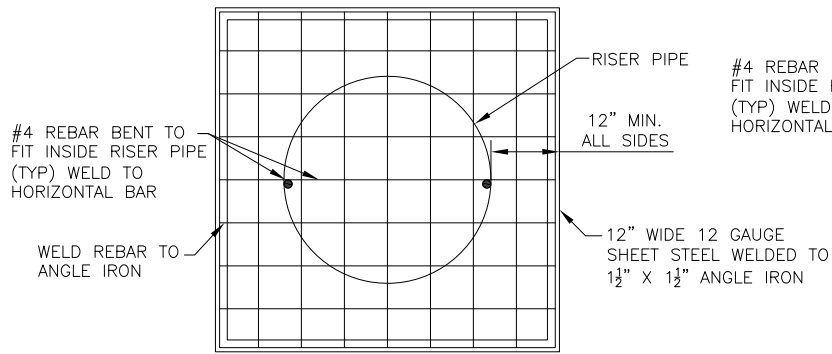

SQUARE TRASH RACK

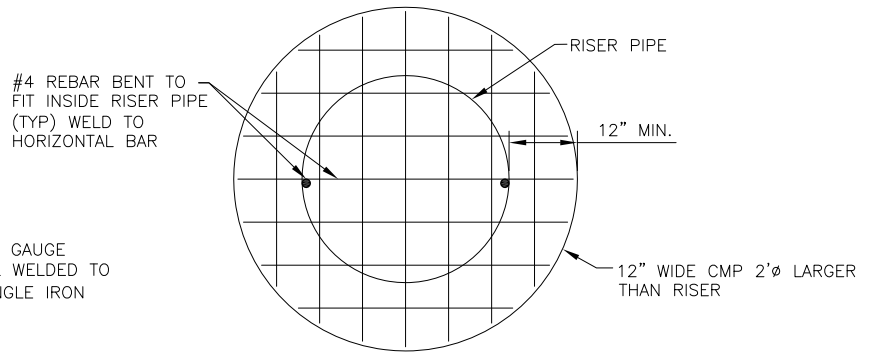

ROUND TRASH RACK

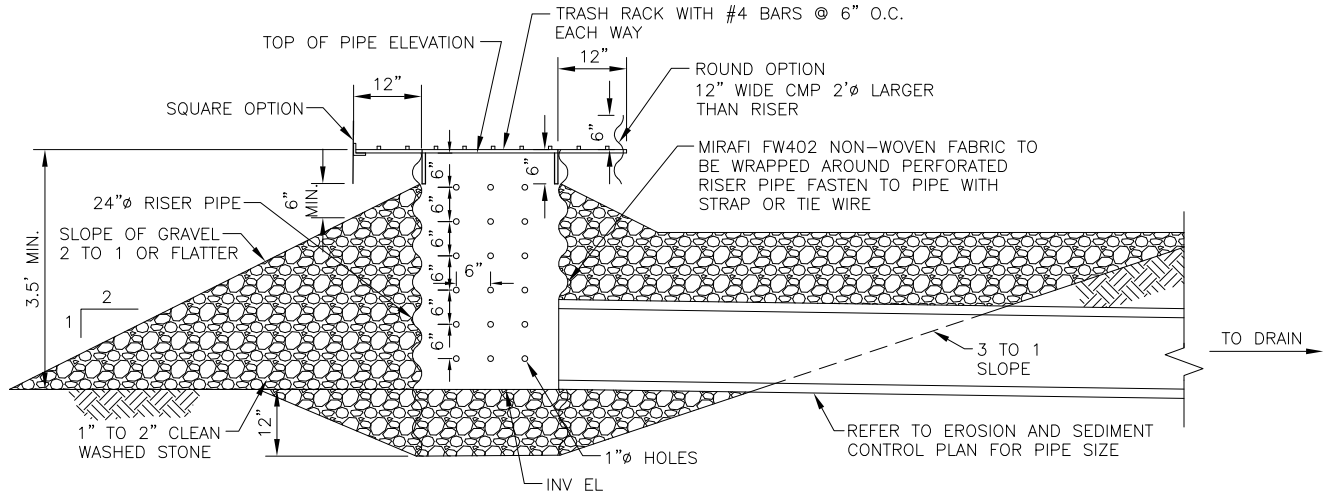

SEDIMENT BASIN OUTLET STRUCTURE DETAIL

NO SCALE